





ELECTRO ADAPTER INC.
CHATSORTH, CALIFORNIA, USA 91311
PHONE (818) 998-1198
FAX (818) 709-5773

SPIN COUPLING, SHRINK BOOT ADAPTER
MIL-DTL-38999 (SERIES III & IV)

3140

SHEET 1 OF 1

Add'l finish options [TABLE IV](#) [click here](#)

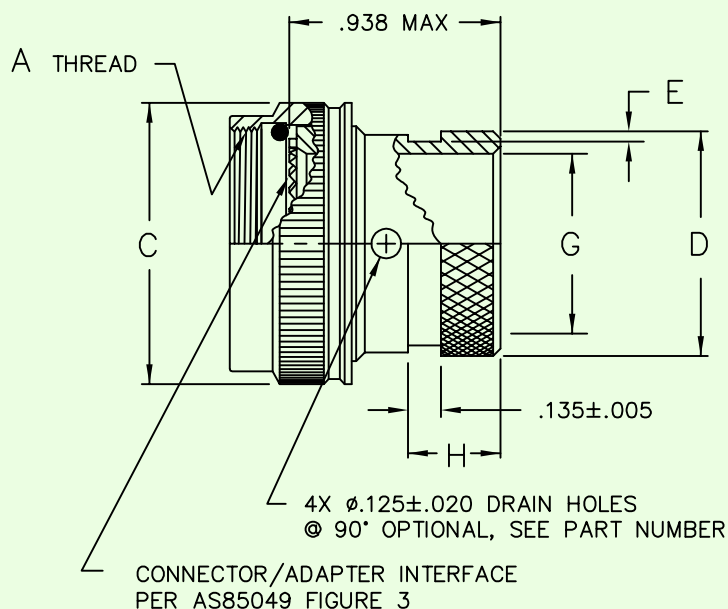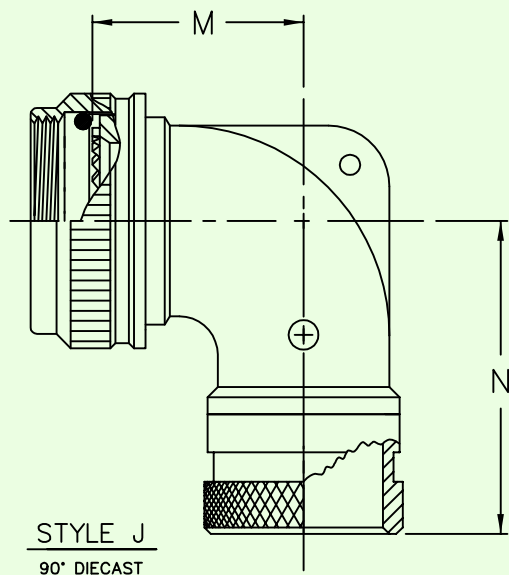

Example Part Number

3140-12056J

ADAPTER SERIES
SHRINK BOOT ADAPTER

CONNECTOR CODE NUMBER
MIL-DTL-38999, SERIES III & IV
CONNECTOR

PLATING CODE NUMBER
CODE 03 - CADMIUM, OLIVE DRAB, PER
SAE AMS-QQ-P-416, TYPE II, CLASS 3.
CODE 56 - ELECTROLESS NICKEL, PER
AMS-2704F, WITH IRIDITE CONVERSION
FOR ADDITIONAL FINISH OPTIONS, SEE CATALOG TABLE 4.

DRAIN HOLE OPTION
0 = NOT REQUIRED, 1 = WITH DRAIN HOLES
2 = .058 DIA HOLES, 8 = #4-40 TAP WITH 'C' BORE
CONSULT FACTORY FOR ADDITIONAL OPTIONS

ADAPTER STYLE
ADD "J" FOR STYLE J ADAPTER
OTHERWISE LEAVE BLANK

CONNECTOR ORDER NUMBER

ORDER NUMBER	SHELL SIZE		A METRIC THD CLASS 6H	ØC MAX	ØD MAX	ØE MIN	ØG MIN	H MAX	M MAX	N MAX
	COM'L	MIL								
0 8	9	A	M12 X 1.0	.719	.533	.044	.250	.425	.500	1.672
1 0	11	B	M15 X 1.0	.843	.605	.044	.375	.425	.595	1.788
1 2	13	C	M18 X 1.0	.969	.774	.044	.500	.425	.610	1.805
1 4	15	D	M22 X 1.0	1.093	.838	.044	.620	.425	.700	1.875
1 6	17	E	M25 X 1.0	1.219	.963	.044	.745	.425	.885	1.905
1 8	19	F	M28 X 1.0	1.343	1.042	.044	.812	.425	.975	2.075
2 0	21	G	M31 X 1.0	1.469	1.217	.069	.938	.425	.975	2.082
2 2	23	H	M34 X 1.0	1.593	1.355	.069	1.062	.425	1.125	2.198
2 4	25	J	M37 X 1.0	1.719	1.443	.069	1.175	.425	1.125	2.160

NOTES: UNLESS OTHERWISE SPECIFIED.

- ASSEMBLY IDENTIFICATION PER MIL-STD-1285.
- MATERIAL: ADAPTER BODY & COUPLING RING,
ALUMINUM ALLOY.
O'RING, SILICONE.

REV D