



ELECTRO ADAPTER INC.
CHATSWORTH, CALIFORNIA, USA 91311
PHONE :(818) 998-1198
FAX :(818) 709-5773

**SECTION 1 - MECHANICAL
STRAIN RELIEF, SINGLE RING ,
GLAND SEAL
SAE AS85049 CATEGORY 1**

E * * 05

SHEET 1 OF 2


Table 2 - Cable Entry Data

ENTRY ORDER NUMBER	ENVIRONMENTAL GLAND RANGE		NON ENVIRONMENTAL CABLE RANGE		V UNIFIED THREAD
	MAX	MIN	MAX	MIN	
03	.250	.156	.250	.156	.500-28
04	.312	.188	.312	.188	.625-24
06	.438	.281	.438	.281	.750-20
08	.562	.375	.562	.344	.875-20
10	.625	.500	.625	.375	1.000-20
12	.750	.500	.750	.438	1.188-18
16	.938	.625	.938	.562	1.438-18
20	1.250	.938	1.250	.750	1.750-18
24	1.375	1.000	1.375	.781	2.000-18
28	1.625	1.250	1.625	.969	2.250-16
32	1.875	1.500	1.875	1.125	2.500-16


WHEN MAXIMUM CABLE ENTRY EXCEEDS THE
CONNECTOR INTERFACE DIAMETER, A 2 PIECE
ADAPTER WILL BE SUPPLIED.

Table 3 - Length Code Data


CONN CODE NUMBER	MIN ORDER LENGTH	MIN LENGTH CODE
18	1.250	05
19	1.750	07
21	1.250	05
30	1.500	06
32	1.750	09
40	1.250	05
41	1.250	05
47	1.250	05
51	1.250	05
54	1.250	05
61	1.500	06
76	1.250	05

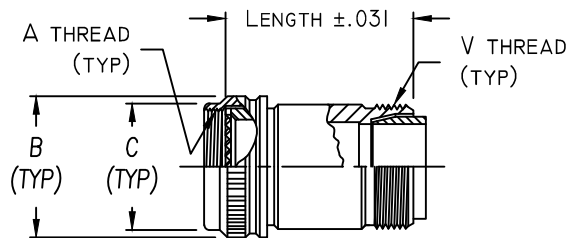


STYLE S

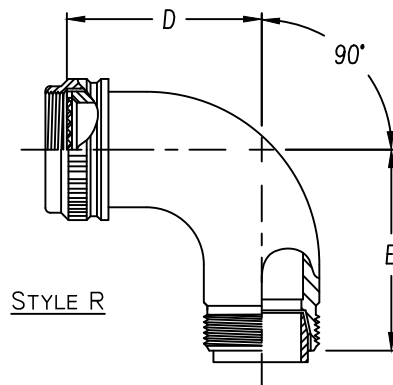

STYLE R

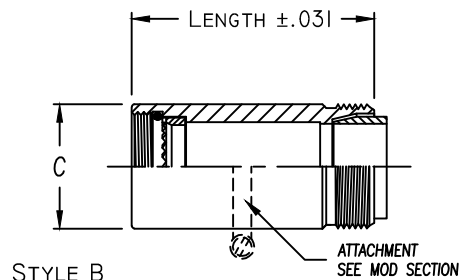

STYLE B

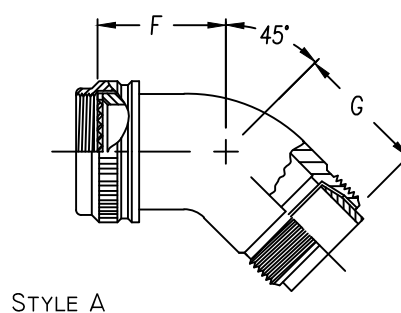

STYLE A

ASSEMBLY PART NUMBER

TO ESTABLISH YOU P/N, USE THE FOLLOWING EXAMPLE

E 41 05 S 23 08 9 B 06 51

FUNCTION DESIGNATOR
E-EMI ADAPTER

CONNECTOR CODE NUMBER - TABLE 1 (6)

SERIES PART NUMBER

ADAPTER STYLE
S = STRAIGHT SPIN COUPLING ADAPTER
B = STRAIGHT BASIC ADAPTER
R = 90° ADAPTER
A = 45° ADAPTER

ACCESSORY ORDER NUMBER-TABLE 1

CABLE ENTRY ORDER NUMBER-TABLE 2

MOD CODE (6)

PLATING CODE NUMBER-TABLE 4 (6)

LENGTH CODE NUMBER
LENGTHS ARE CHOSEN IN 1/4" INCREMENTS
(IE 08=2.00") SEE TABLE 3 FOR MINIMUM
INSERT 00 FOR R & A STYLE ADAPTERS

GLAND & O'RING MATERIAL OPTION
B - NEOPRENE & BUNA-N
S - SILICONE
N - NONE REQUIRED (NON ENVIROMENTAL)

CABLE STRAIN-RELIEF STYLE (8)

Table 1 - Order Number Data

E * * 05

SHEET 2 OF 2

Accessory Order Number By Connector Code & Shell Size

ORDER NUMBER	18 (4)	21	32 (2)	40 (3)	41	54	64	61	76	A UNIFIED THREAD	B MAX DIA.	C MAX DIA.	(7) D ±.125 DIM.	E MAX DIM.	(7) F ±.125 DIM.	G MAX DIM.	ORDER NUMBER
01	8S (B)									.375-32	.750	.531					01
03	8S (A)									.438-27	.812	.594					03
04	8S (C)	8			8, 9				8	.438-28	.812	.594	1.125	1.188	.812	.875	04
05						8 & 8S				.500-20	.875	.656					05
06	10S (-)							8, A		.500-28	.875	.656					06
07				9, A						M12 x 1.0	.719	.656					07
08	10SL (C)	10			10, 11		3		10	.562-24	.844	.719					08
10	10SL(A,B), 12, 12S(B,C)					10, 10S, 10SL		12		.625-24	1.000	.781	1.250	1.312	.875	.938	10
11				11, B				10, B		.625-28	1.000	.781					11
12										M15 x 1.0	.844	.781					12
13	12 & 12S (A)	12		12, 13					12	.688-24	1.062	.844	1.375	1.438	.938	1.000	13
15	14 & 14S (-)		12			12 & 12S	7	14		.750-20	1.125	.906					15
16				13, C						M18 x 1.0	.969	.906					16
18		14			14, 15				14	.812-20	1.188	.969	1.500	1.562	1.000	1.062	18
19	16 & 16S (-)		14			14 & 14S	12	16		.875-20	1.250	1.031					19
20								14, D		.875-28	1.250	1.031					20
21				15, D						M22 x 1.0	1.094	1.031					21
23		16			16, 17				16	.938-20	1.312	1.094					23
24	18 (-)		16			16 & 16S	19	18		1.000-20	1.375	1.156	1.625	1.688	1.062	1.125	24
25								16, E		1.000-28	1.375	1.156					25
26				17, E						M25 x 1.0	1.219	1.156					26
28		18			18, 19	18	27		18	1.062-18	1.438	1.219					28
29	20 (-)		18					20		1.125-18	1.500	1.281	1.750	1.812	1.094	1.156	29
30	20 (R)									1.125-24	1.500	1.281					30
31								18, F		1.125-28	1.500	1.281					31
32				19, F						M28 x 1.0	1.344	1.281					32
34		20			20, 21	20	37		20	1.188-18	1.562	1.344					34
35	22 (-)		20					22		1.250-18	1.625	1.406	1.875	1.938	1.156	1.219	35
36								20, G		1.250-28	1.625	1.406					36
37				21, G						M31 x 1.0	1.469	1.406					37
39		22			22, 23	22			22	1.312-18	1.688	1.469					39
40	24 (-)		22					24		1.375-18	1.750	1.531	2.000	2.062	1.188	1.250	40
41								22, H		1.375-28	1.750	1.531					41
42				23, H						M34 x 1.0	1.594	1.531					42
44		24			24, 25	24			24	1.438-18	1.812	1.594					44
45							61			1.500-18	1.875	1.656					45
46								24, J		1.500-28	1.875	1.656	2.125	2.188	1.250	1.312	46
47				25, J						M37 x 1.0	1.719	1.656					47
48										1.562-18	1.938	1.719					48
49	28 (-)		24					28		1.625-18	2.000	1.781	2.375	2.625	1.344	1.625	49
51						28				1.750-18	2.125	1.906					51
52	32 (B,C)		28					32		1.875-16	2.250	2.031					52
53	32 (A,R)									1.906-18	2.281	2.062	2.625	3.000	1.438	1.812	53
54						32				2.000-18	2.375	2.156					54
55	36 (B)		32					36		2.062-16	2.469	2.219					55
56	36 (R)									2.062-24	2.469	2.219					56
57	36 (C)									2.125-16	2.500	2.281	2.875	3.250	1.562	1.938	57
58	36 (A)									2.125-18	2.500	2.281					58
59						36				2.250-16	2.625	2.406					59
60	40 (B)		36					40		2.312-16	2.719	2.469					60
61	40 (A,C)									2.375-16	2.750	2.531	3.125	3.500	1.688	2.062	61
62						40				2.500-16	2.875	2.656					62

NOTES: UNLESS OTHERWISE SPECIFIED.

1 THREADS ARE RIGHT HAND IN ACCORDANCE WITH FED-STD-H28, CLASS 2B.

(2) THREADS NOTED ARE LEFT HAND, CLASS 2B.

(3) THREADS NOTED ARE ISO METRIC, CLASS 6H.

(4) CODE 18 SHELL SIZES ARE FOLLOWED IN PARENTHESIS BY CONNECTOR MFR CODE. SEE CONNECTOR CODE 18 CHART AT RIGHT & EXAMPLE PART NUMBER FOR DETAILS.

5 TABLE 1 LISTS THE MOST USED CONNECTOR CODES. SEE SECTION 11 FOR OTHER CODES AVAILABLE AND COMPLETE CONNECTOR PART NUMBER CROSS REFERENCE.

(6) SEE SUPPORT DATA SECTION FOR PLATING AND MODIFICATION CODE OPTIONS.

(7) ADD .25 TO "D" & "F" FOR CONNECTOR CODES 30, 32 & 61.

(8) SEE SUPPORT DATA SECTION FOR TABLE V & AVAILABLE STYLES


(4) Connector Code 18 Chart

CONNECTOR	CONNECTOR MANUFACTURER
CODE	(MS3100, MS3101, MS3106 & MS3107)
A	AMPHENOL, CLASS A
B	BENDIX, CLASS A, E & R
C	CANNON, CLASS A, E & R
D	MFR. UNKNOWN, CLASS A, E & R
R	AMPHENOL, CLASS R
-	MFR. CODE NOT REQUIRED




Table 2 - Environmental / Non-Environmental Cable Entry Data


ENTRY ORDER NUMBER	ENVIRONMENTAL		NON ENVIRONMENTAL		V	R	S	T	U	W	X	Y	Z
	GLAND RANGE		CABLE RANGE		UNIFIED	MAX	MAX	MAX	MAX	MAX	MAX	MAX	MAX
	MAX	MIN	MAX	MIN	THREAD	DIM.	DIM.	DIM.	DIM.	DIM.	DIM.	DIM.	DIA.
03	.250	.156	.250	.156	.500-28	N / A	.812	1.375	.812	N / A	.844	.781	.656
04	.312	.188	.312	.188	.625-24	1.031	.937	1.375	.937	.875	.844	.906	.781
06	.438	.281	.438	.281	.750-20	1.031	1.062	1.375	1.062	1.000	.906	1.094	.906
08	.562	.375	.562	.344	.875-20	1.031	1.188	1.375	1.188	1.125	.969	1.188	1.031
10	.625	.500	.625	.375	1.000-20	1.094	1.312	1.437	1.312	1.250	.969	1.281	1.156
12	.750	.500	.750	.438	1.188-18	1.219	1.562	1.437	1.562	1.375	.969	1.500	1.344
14	.875	.750	.875	.719	1.250-18	N / A	N / A	N / A	N / A	1.500	N / A	N / A	N / A
16	1.000	.844	1.000	.781	1.438-18	1.219	1.750	1.562	1.750	1.625	1.062	1.719	1.594
20	1.250	.938	1.250	.750	1.750-18	1.344	2.250	1.812	2.250	1.750	1.125	2.062	1.906
24	1.375	1.000	1.375	.781	2.000-18	N / A	2.375	2.062	2.375	N / A	1.188	2.312	2.156
28	1.625	1.250	1.625	.969	2.250-16	N / A	2.625	2.062	2.625	N / A	1.719	2.719	2.406
32	1.875	1.500	1.875	1.125	2.500-16	N / A	2.812	2.188	2.812	N / A	1.781	2.969	2.656




STYLE 1
AS85049/41A CLAMP
(MS 3057**A)




STYLE 2
NUT




STYLE 3
NON-ENVIRONMENTAL




STYLE 3
NUT
ENVIRONMENTAL
(AS85049/1)
(MS 3057**B)




STYLE 3
ENVIRONMENTAL




STYLE 4
STRAIN RELIEF
ENVIRONMENTAL
(AS85049/2)
(MS 3057**C)



STYLE 4
ENVIRONMENTAL



STYLE 4
NON-ENVIRONMENTAL



STYLE 9
STRAIN-RELIEF CLAMP
WITH TELESCOPING SCREWS

NOTES: UNLESS OTHERWISE SPECIFIED

AVAILABLE ONLY ON: A**01, A**30, E**01, E**03, E**04, E**05, E**07, E**21, E**30, & E**33

AVAILABLE ONLY ON: E**15, E**17, E**38, E**40, & E**41

3. CONSULT FACTORY FOR SIZES AND INFORMATION NOT LISTED