




Table 2 - Cable Entry Data

ENTRY ORDER NUMBER	CABLE RANGE		V	W
	MAX	MIN	UNIFIED THD CLASS 2A	REF
04	.250	.125	.625 - 24	.844
06	.375	.219	.750 - 20	.984
08	.500	.344	.875 - 20	1.125
10	.625	.469	1.000 - 20	1.344
12	.750	.594	1.125 - 18	1.344
14	.875	.719	1.250 - 18	1.469

AVAILABLE FOR CONNECTOR CODES 40, 41, 47 & 54. CONSULT FACTORY FOR TABLE 1 DIMENSIONS ON OTHER CODES.

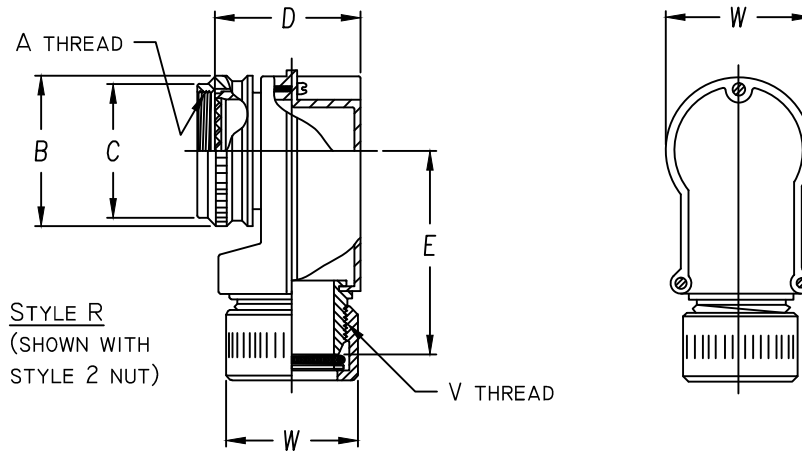

ASSEMBLY PART NUMBER

TO ESTABLISH YOUR P/N, USE THE FOLLOWING EXAMPLE

E 41 40 R 23 08 9 51

FUNCTION DESIGNATOR
E - EMI ADAPTER

CONNECTOR CODE NUMBER - TABLE 1 (6)

SERIES PART NUMBER

ADAPTER STYLE
R = 90° ADAPTER

ACCESSORY ORDER NUMBER - TABLE 1

MOD CODE (6)

PLATING CODE NUMBER - TABLE 4 (6)

CABLE STRAIN - TABLE V (8)

CABLE ENTRY ORDER NUMBER - TABLE 2

Table 1 - Order Number Data

E * * 40

SHEET 2 OF 2

Accessory Order Number By Connector Code & Shell Size

ORDER NUMBER	MS3100 SERIES	MIL-DTL-5015 SOLDER CONTACT	MIL-DTL-26482 SERIES 1	MIL-DTL-22992 CLASS C, J & R	MIL-DTL-38999 SERIES III & IV	MIL-DTL-38999 SERIES I & II	MIL-DTL-5015 CRIMP	MIL-DTL-26482 SER 2	MIL-DTL-83723 SER III	MIL-C-81703 NAS 1599	LITTON VEAM, CIR SERIES	MIL-C-81511 SERIES 1, 2, 3 & 4	PATT 105, PATT 803	PATT 808	ORDER NUMBER
	18 ④	21	32 ②	40 ③	41	54	64	61	76	A UNIFIED THREAD	B MAX DIA.	C MAX DIA.	D MAX DIM.	E MAX DIM.	
01	8S (B)														01
03	8S (A)														03
04	8S (C)	8			8, 9				8				.893	1.663	04
05						8 & 8S							.656		05
06	10S (-)								8, A				1.462		06
07				9, A									.893		07
08	10SL (C)	10			10, 11			3		10			.719		08
10	10SL(A,B), 12, 12S(B,C)					10, 10S, 10SL			12				.781	.893	10
11									10, B				1.462		11
12				11, B									.893		12
13	12 & 12S (A)	12			12, 13				12				.893		13
15	14 & 14S (-)		12			12 & 12S	7	14					1.369	1.663	15
16				13, C									.893		16
18		14			14, 15					14			.969		18
19	16 & 16S (-)		14			14 & 14S	12	16					1.031	1.763	19
20									14, D				1.577		20
21				15, D									.981		21
23		16			16, 17				16				1.094		23
24	18 (-)		16			16 & 16S	19	18					1.156	1.863	24
25									16, E				1.824		25
26				17, E									1.230		26
28		18			18, 19	18	27		18				1.219		28
29	20 (-)		18						20				1.202		29
30	20 (R)													1.863	30
31									18, F				1.796		31
32				19, F									1.202		32
34		20			20, 21	20	37		20				1.223		34
35	22 (-)		20						22				1.807	1.863	35
36									20, G				1.406		36
37				21, G									1.223		37
39		22			22, 23	22			22				1.181		39
40	24 (-)		22						24				1.775	1.863	40
41									22, H				1.531		41
42				23, H									1.181		42
44		24			24, 25	24			24				1.181		44
45							61						1.656	1.863	45
46									24, J				1.775		46
47				25, J									1.181		47

NOTES: UNLESS OTHERWISE SPECIFIED.

1 THREADS ARE RIGHT HAND IN ACCORDANCE WITH FED-STD-H28, CLASS 2B.

② THREADS NOTED ARE LEFT HAND, CLASS 2B.

③ THREADS NOTED ARE ISO METRIC, CLASS 6H.

④ CODE 18 SHELL SIZES ARE FOLLOWED IN PARENTHESIS BY CONNECTOR MFR CODE. SEE CONNECTOR CODE 18 CHART AT RIGHT & EXAMPLE PART NUMBER FOR DETAILS.

5 TABLE 1 LISTS THE MOST USED CONNECTOR CODES. SEE SECTION 11 FOR OTHER CODES AVAILABLE AND COMPLETE CONNECTOR PART NUMBER CROSS REFERENCE.

⑥ SEE SUPPORT DATA SECTION FOR PLATING AND MODIFICATION CODE OPTIONS.

⑦ ADD .25 TO "D" & "F" FOR CONNECTOR CODES 30, 32 & 61.

⑧ SEE SUPPORT DATA SECTION FOR TABLE V & AVAILABLE STYLES

④ Connector Code 18 Chart

CONNECTOR CODE	CONNECTOR MANUFACTURER (MS3100, MS3101, MS3106 & MS3107)
A	AMPHENOL, CLASS A
B	BENDIX, CLASS A, E & R
C	CANNON, CLASS A, E & R
D	MFR. UNKNOWN, CLASS A, E & R
R	AMPHENOL, CLASS R
-	MFR. CODE NOT REQUIRED