
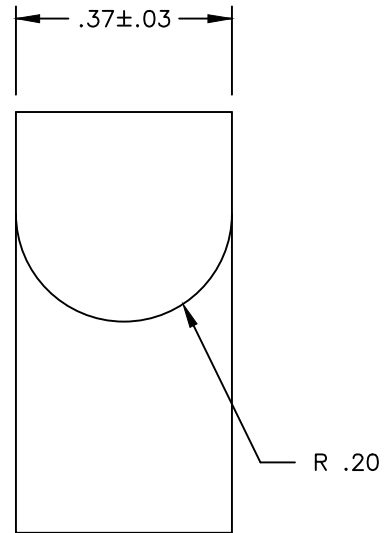


| DASH NO. | $\phi A$<br>$\pm .03$ | SPRING NO. OF TURNS<br>$\pm .25$ |
|----------|-----------------------|----------------------------------|
| 1        | .36                   | 4.50                             |
| 2        | .57                   | 3.00                             |
| 3        | .73                   | 4.25                             |
| 4        | .98                   | 3.50                             |

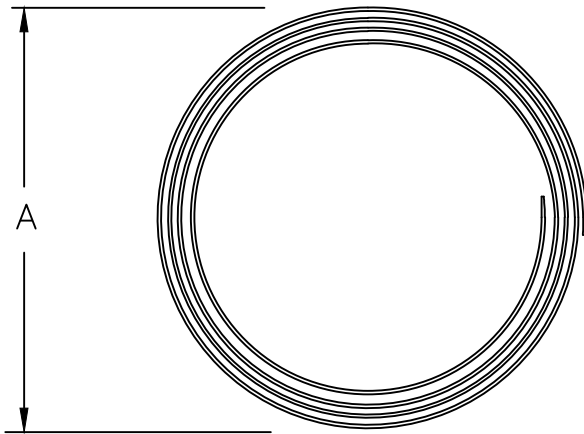

NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL: CORROSION RESISTANT STEEL, PER AMS-5519 OR ASTM-A-666, FULL HARD. (Rc 49 MIN.)