








ELECTRO ADAPTER INC.
CHATSORTH, CALIFORNIA, USA 91311
PHONE (818) 998-1198
FAX (818) 709-5773

**SECTION 3 - RECTANGULAR ADAPTER
MAGNEFORMED SHIELD TERMINATION
STRAIGHT, 45°, & 90° FRONT ENTRY
MIL - DTL - 83513, /1, /2, /3, & /4, MICRO D**

901-726

SHEET 1 OF 1

Add'l finish options **TABLE IV** [click here](#)

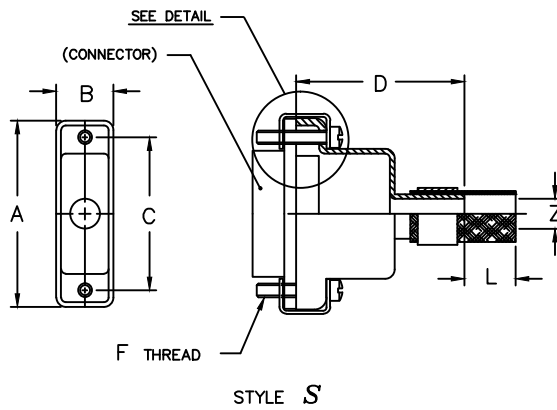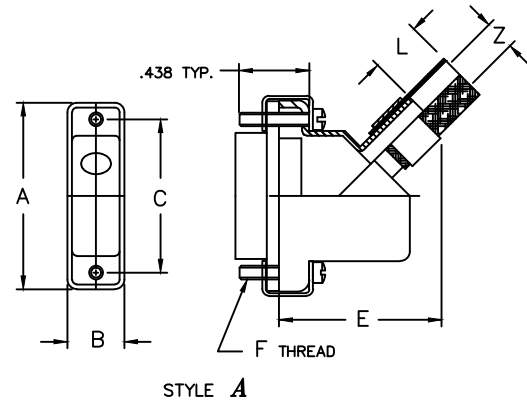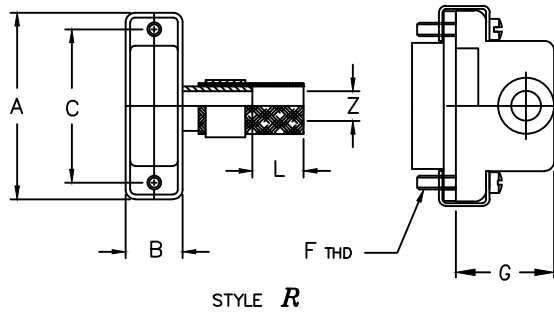

Example Part Number
901-726S25030655*C

BASIC ADAPTER NO.

ADAPTER STYLE
S - STRAIGHT ADAPTER
A - 45° ADAPTER
R - 90° ADAPTER

CONNECTOR ORDER NUMBER									
SHELL SIZE	A ±.010	B ±.010	C ±.010	D ±.020	E MAX	F UNIFIED THD	G ±.031	MAX ENTRY	
0 9	.775	.360	.565	.750	1.00	2-56UNC-2A	.607	05	
1 5	.925	.360	.715	.880	1.03	2-56UNC-2A	.634	05	
2 1	1.075	.360	.865	1.000	1.05	2-56UNC-2A	.677	05	
2 5	1.175	.360	.965	1.060	1.09	2-56UNC-2A	.718	05	
3 1	1.325	.360	1.115	1.120	1.13	2-56UNC-2A	.726	05	
3 7	1.475	.360	1.265	1.160	1.16	2-56UNC-2A	.744	05	
5 1	1.425	.400	1.215	1.190	1.25	2-56UNC-2A	.828	07	
1 0 0	2.160	.450	1.800	1.250	1.32	4-40UNC-2A	.948	09	

CABLE ENTRY ORDER NUMBER	
ENTRY NUMBER	ØZ ±.010
0 1	.125
0 2	.156
0 3	.188
0 4	.219
0 5	.250
0 6	.281
0 7	.312
0 8	.344
0 9	.375

PLATING CODE NUMBER
CODE 55 - CADMIUM PER QQ-P-416, TYPE II, CLASS 3, OVER ELECTROLESS NICKEL PER MIL-C-26074 CLASS 3 OR 4, GRADE B.
CODE 56 - ELECTROLESS NICKEL PER MIL-C-26074, CLASS 4, GRADE A.
FOR ADDITIONAL FINISH OPTIONS, SEE CATALOG TABLE 4.

LENGTH CODE "L"
LENGTH IN 1 INCH INCREMENTS
6 INCH MINIMUM ORDER LENGTH
00 - IF SHIELD NOT REQUIRED

JACKSCREW TYPE
F = 2 MALE FILLISTER
H = 2 MALE HEX SOCKET
J = 2 FEMALE JACKPOST
OMIT IF JACKSCREWS NOT REQUIRED

ADD 'C' FOR ADAPTER SUPPLIED WITH SCREW RETENTION CLIPS, OMIT IF NOT REQUIRED.

NOTES: UNLESS OTHERWISE SPECIFIED.

1. ASSEMBLY IDENTIFICATION PER MIL-STD-1285.

2. MATERIAL: ADAPTER - ALUMINUM ALLOY.
HARDWARE - SST.
BRAID - TINNED COPPER.

3. SCREWS CAPTIVATED WITH NYLON WASHERS STANDARD, NOT SUPPLIED WITH 'C' OPTION.

4. CONSULT FACTORY FOR ADAPTERS THAT MATE WITH /6, /7, /8 & /9 CLASS P (PLASTIC SHELL CONNECTORS).