

PART NUMBER			
902-150F			
REVISIONS			
LTR	ECO NUMBER	DRAWN	APPROVED
—	.	.	.

Example Part Number

902-150F2503055 * C

BASIC ADAPTER NO.

ADAPTER STYLE

F = FRONT 90° ADAPTER

ADD 'C' FOR ADAPTER SUPPLIED WITH SCREW
RETENTION CLIPS, OMIT IF NOT REQUIRED.

PLATING CODE NUMBER

CODE 55 - CADMIUM, OLIVE DRAB, PER
QQ-P-416, TYPE II, CLASS 3,
OVER ELECTROLESS NICKEL PER
MIL-C-26074 CLASS 3 OR 4, GRADE B.CODE 56 - ELECTROLESS NICKEL, PER
MIL-C-26074, CLASS 4, GRADE A.FOR ADDITIONAL FINISH OPTIONS,
SEE CATALOG TABLE 4.

BAND OPTION

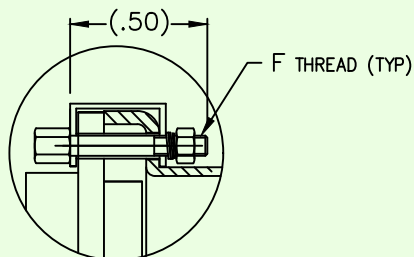


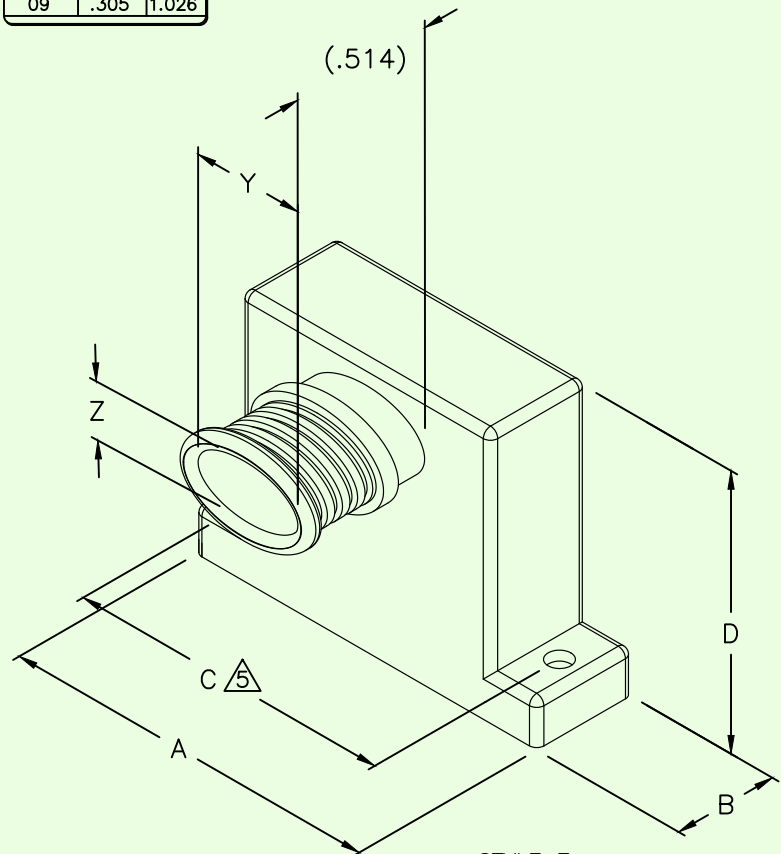
0 = ADAPTER ONLY
3 = 1/4" BAND WITH SHRINK SLEEVE
(REF 214LF002 & 27-RP)
4 = 1/4" CBS (REF 214LF002)
8 = 1/8" MINI (REF 214LF005)
9 = 1/4" BAND (REF 214LF006)

JACKSCREW TYPE

F = 2 MALE FILLISTER
H = 2 MALE HEX SOCKET
J = 2 FEMALE JACKPOST
OMIT IF JACKSCREWS
NOT REQUIRED

CONNECTOR ORDER NUMBER						
SHELL SIZE	A ±.010	B ±.010	C ±.010	D ±.010	F UNIFIED THD	MAX ENTRY
0 9	.775	.360	.565	.591	2-56UNC-2A	0 4
1 5	.925	.360	.715	.650	2-56UNC-2A	0 5
2 1	1.075	.360	.865	.709	2-56UNC-2A	0 5
2 5	1.175	.360	.965	.787	2-56UNC-2A	0 6
3 1	1.325	.360	1.115	.827	2-56UNC-2A	0 6
3 7	1.475	.360	1.265	.866	2-56UNC-2A	0 7
5 1	1.425	.400	1.215	.906	2-56UNC-2A	0 8
6 9	1.732	.400	1.515	.945	2-56UNC-2A	0 8
1 0 0	2.160	.450	1.800	.984	4-40UNC-2A	0 9

ENTRY ORDER NUMBER		
ENTRY NO	Z ±.010	Y ±.010
01	.062	.062
02	.125	.125
03	.188	.188
04	.226	.278
05	.226	.428
06	.226	.600
07	.226	.794
08	.266	.900
09	.305	1.026

4. FEMALE JACK POST
SEE PART NUMBER3. NYLON WASHER
SEE PART NUMBER3. RETENTION CLIP
SEE PART NUMBERSTYLE F
90° FRONT ENTRY

NOTES: UNLESS OTHERWISE SPECIFIED.

1. ASSEMBLY IDENTIFICATION PER MIL-STD-1285.
2. MATERIAL: ADAPTER - ALUMINUM ALLOY.
HARDWARE & BAND - SST

3. SCREWS CAPTIVATED WITH NYLON WASHERS STANDARD,
NOT SUPPLIED WITH 'C' OPTION.4. JACK POST SUPPLIED WITH 2 FLAT WASHERS,
1 LOCK WASHER AND 1 HEX NUT.

5. DIM IS FROM CENTER TO CENTER OF HOLES

The information disclosed herein is the property of, and a proprietary item originated by ELECTRO ADAPTER, INC., who reserves all patent, proprietary design, use, sale, manufacturing and reproduction rights thereto; except for uses expressly granted to the United States Government and items which are vendor parts, disclosure shall not be made without written consent from ELECTRO ADAPTER, INC.

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES

TOLERANCES: ANGLES DECIMALS
* 2' .XX = ± .06
XXX = ± .031

DO NOT SCALE DRAWING

DRAWN S.JDC DATE 6/24/26

CHKD G.FISH DATE 6/24/26

APVD G.FISH DATE 6/24/26

G.FISH 6/24/26

RELEASED DATE

ELECTRO ADAPTER, INC.
CHATSORTH, CA. 91311-6189DRAWING TITLE
FRONT ENTRY 90° BACKSHELL, EMI/RFI
FOR MIL-C-83513 /1, /2, /3 & /4
CLASS M, MICRO-D,
MINI BAND SHIELD TERMINATION

SIZE A CAGE CODE 31461 DRAWING NUMBER 902-150F REV. —

SCALE: NONE 0\SALES\902\150F SHEET 1 OF 1